

# SŁUPY PROWADZĄCE

## GUIDE PILLARS WITH HOLE

### DIN 9833 / ISO 9182-3

# C9F

Materiał / Material

< ø100 1.7131, ø100 C50


Twardość / Hardness

60 ÷ 64 HRC

Jak zamówić / How to order

Symbol: C9F100355

Inne wymiary na żądanie  
Other dimensions on demand

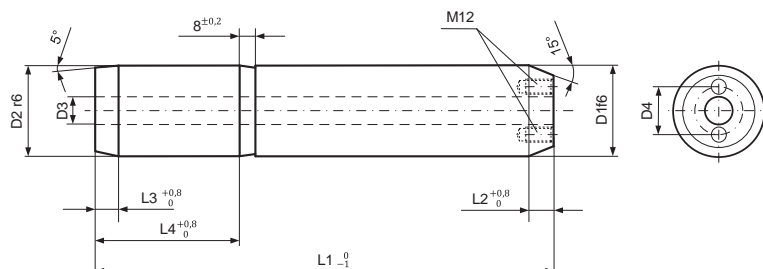

Symbol	D1	L1	D2	D3	D4	L2	L3	L4
C9F80200	80	200	80	40	58	10	4	100
C9F80224		224						
C9F80250		250						
C9F80280		280						
C9F80315		315						
C9F80355		355						
C9F80400		400						
C9F80450		450						
C9F80500		500						
C9F100224	100	224	100	50	72	10	4	125
C9F100250		250						
C9F100280		280						
C9F100315		315						
C9F100355		355						
C9F100400		400						
C9F100450		450						
C9F100500		500						
C9F125315		125						
C9F125355	355							
C9F125400	400							
C9F125450	450							
C9F125500	500							
C9F160400	160	400	160	95	132	12	5	180
C9F160450		450						
C9F160500		500						
C9F160560		560						

Elementy prowadzące do tłoczników